


WRAP AROUND TRAY/CASE PACKER

PACK V/WADL


Stainless steel frame



POLYPACK SECS

DISSAY-SOUS-COURCILLON
72500 CHÂTEAU DU LOIR France
TEL. : +33 (0)2 43 44 03 94 - FAX. : +33 (0)2 43 79 49 74
www.polypack.fr - E.mail : polypack@polypack.fr

PACK V/WA DL

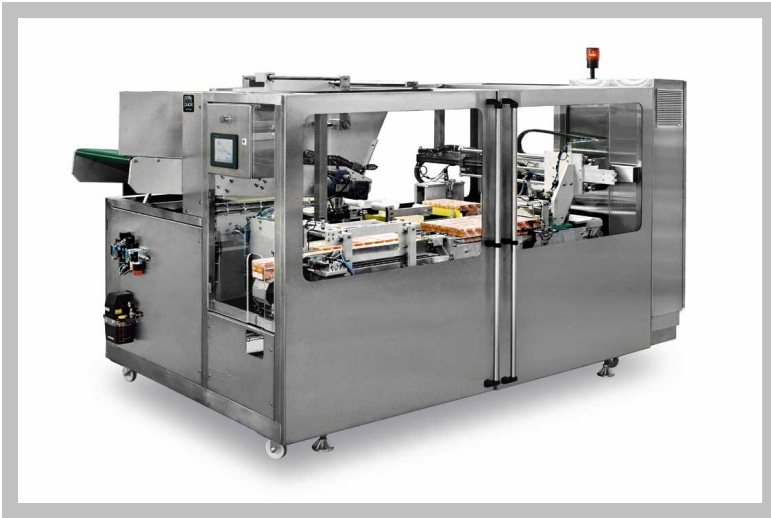

Principle

- **V/WA** : Filling a tray/case erected from a blank and wrap around closed
- **D** :step by step motion
- **L** : Lateral in feed product onto the blank cardboard
- Tray forming with small / high sides, upper horizontal flaps
- Grouping pattern selecting adapted
- Change over quick and easy
- Capacity : up to 20 cycles/mn

Technical specification

- Stainless steel construction
- Safety panels with large windows, total access to all parts
- Venturi vacuum sucker device for blank extraction
- Folding blank during the motion through upper & lower wrap
- Setting at right angles in the ramps
- Hot melt gluing device
- PLC control in electric cabinet integrated in the frame or outside
- Main voltage: 400 volts triphasis
- Control voltage : 24 volts
- Power supply : 10 KVA
- Operating air pressure : 6 bars
- Centralized lubrication on common rail; automatic in option
- Safety and control indicators
- Equipment built meets EC-norms compliances
- Equipment delivered with maintenance and operating manual

Options

- Divider device for square shape
- Multi pattern with quick and easy change over by wheel and screw
- 90° out feed
- Hot melt gluing device different from POLYPACK standard

